



Flexible pipe connected for grease nipples

Flexible pipe connected for grease nipples in thermoplastic material.

Crimped fittings, male M10x1 threaded connection.

Operating pressure: 150 bar.

Bursting pressure: 600 bar.



Code	€	Length (mm)
P502550030	---	300
P502550040	---	400
P502550050	---	500

Code	€	Length (mm)
P502550060	---	600
P502550070	---	700



Automatic lubricator

Programmable automatic lubricator can be set in 7 different periods to choose between 1 and 12 months; regulation, duration and activation through a knob on the lubricator.

It ensures lubrication in difficult positions without stopping the machine, it can be installed in the most comfortable position and lubricate a distant point with an extension with a maximum length of 2 m.

It can be filled with a wide range of high performance greases resistant to oil / soap separation.

Robust structure in recycled plastic, the breather valve is activated at 5 bar, warns in the event of obstruction of the greasing channels.



Code	€	Carrying capacity (ml)	Threaded coupling (G)	Body ø (mm)	Body height (mm)	Max operating temperature (°C)
P502750120	---	120	1/4	74	120	60



Professional lever grease nipple in steel

Professional lever grease nipple in steel, manually-charged, varnished-steel body.




Code	€	Carrying capacity (g)	B (mm)	C (mm)	Supply (cm³)	Max. pressure (bar)
P502600500	---	500	60	320	1,4	400
P502600750	---	750	60	410	1,4	400
P502601000	---	1000	60	490	1,4	400



Lever grease gun in steel for cartridges

Lever grease gun in steel for cartridges (Item P50265), varnished-steel body.

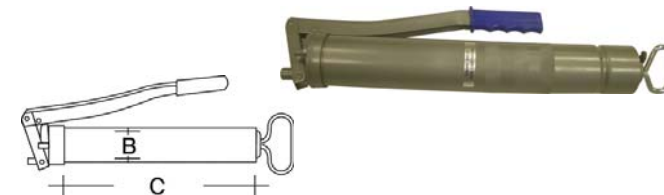

Code	€	Carrying capacity (g)	B (mm)	C (mm)
P502630600	---	600	60	380



Cartridge, universal grease

Lithium grease cartridge, universal type, for hand-held grease nipples and compressed air.

Operating temperature up to 120°C.

Transparent casing.



Code	€	Content (g)	ø (mm)	Length (mm)
P502650005	---	600	56	300