



TKN Shock-absorbing mallet with polyurethane heads

N50370 - Shock-absorbing mallet with interchangeable polyurethane heads, steel main body partially filled with metal grit to absorb rebound, painted finish, ash handle.

N50380 - Shock-absorbing mallet with interchangeable polyurethane heads, steel main body partially filled with metal grit to absorb rebound, painted finish, steel handle coated with non-slip rubber on the grip.



Final Code	N50370		N50370			N50380	
	€	€	Head ø (mm)	Overall length (mm)	Weight (g)	Overall length (mm)	Weight (g)
0035	---	◆	35	340	610	300	635
0040	---	◆	40	345	710	305	765
0050	---	◆	50	355	1060	325	1160
0060	---	◆	60	365	1340	330	1490

N55385	€	Spare head (supplied single)	
		Head ø (mm)	
N553850035	---	◆	35
N553850040	---	◆	40

N55385	€	Spare head (supplied single)	
		Head ø (mm)	
N553850050	---	◆	50
N553850060	---	◆	60

TKN Lever for carpenters

Lever for carpenters, hex section, C40 steel, painted finish, curved crab end and curved flat end.




N55450	€	Overall length (mm)	Hexagonal section (mm)	
N554500600	---	◆	600	18

N55450	€	Overall length (mm)	Hexagonal section (mm)	
N554500800	---	◆	800	18

USAG Chain wrench

chain wrench lightweight model, chrome vanadium steel jaws, painted and burnished running, shoe-profile double-row for operation in both directions of rotation without repositioning the tool.

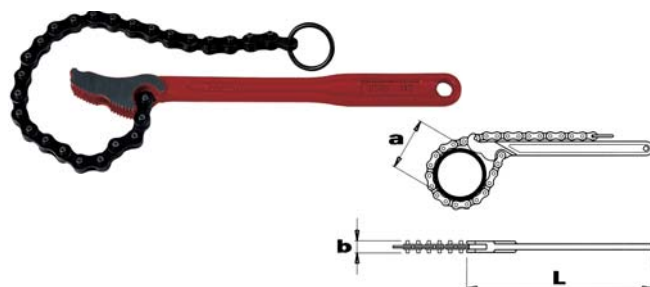

N75045	€	For pipes min÷max ø (inches)	Overall length (mm)	a (mm)	
N750450005	---	◆	2÷4	311	115
N750450010	---	◆	3÷5	617	170

USAG Chain pipe wrenches

Pipe wrenches chain, reversible jaws, robust model for tightening the large ducts.



N75050	€	For pipes min÷max ø (mm)	For pipes min÷max ø (inches)	Overall length (mm)	Arm length (mm)	Weight (Kg)
N750500005	---	◆	13÷76	695	420	4
N750500010	---	◆	27÷114	900	660	6
N750500015	---	◆	34÷165	1000	815	9
N750500020	---	◆	48÷219	1280	1120	15
N750500025	---	◆	60÷320	1630	1335	25