







## Nippers with double lever diagonal cutting edges



Nippers with double lever diagonal cutting edges with hardness approx. 64 HRC, DIN ISO 5743, with knee joint for demultiplication of the cutting effort, in chrome vanadium steel, phosphated finish, to cut materials such as bolts, nails, netting and metal bars, plastic coated handles.





N35667	€	Overall length (mm)	Wire cutting max ø 220 N/mm² (mm)	Wire cutting max ø 750 N/mm² (mm)	Wire cutting max ø 1800 N/mm² (mm)	Wire cutting max ø 2300 N/mm² (mm)
N356670200	-, ♦	200	6	5,2	4	3,6
N356670250	-, ♦	250	-	6	4,3	4,2



# IIGOF

## **Scissors for electricians** with straight blades





N45205	€	Overall length (mm)	Blades length (mm)
N452050155	-,	155	44






#### Chain wrench



chain wrench lightweight model, chrome vanadium steel iaws, painted and burnished running, shoe-profile double-row for operation in both directions of rotation without repositioning the tool.





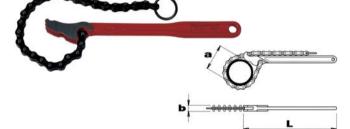

N75045	€	For pipes min÷max ø (inches)	Overall length (mm)	a (mm)
N750450005	-,	2÷4	311	115
N750450010	-,	3÷5	617	170



## Chain pipe wrenches



Pipe wrenches chain, reversible jaws, robust model for tightening the large ducts.





N75050	€	For pipes min÷max ø (mm)	For pipes min÷max ø (inches)	Overall length (mm)	Arm length (mm)	Weight (Kg)
N750500005	-,	13÷76	1/4÷2 1/2	695	420	4
N750500010	-,	27÷114	3/4÷4	900	660	6
N750500015	-,	34÷165	1÷6	1000	815	9
N750500020	-,	48÷219	1 1/2÷8	1280	1120	15
N750500025	-,	60÷320	2÷12	1630	1335	25



### PP case for technical assistance

PP case for technical assistance (polypropylene), injection molded structure with constant thickness, resistant to high and low temperatures, to chemical agents and to impacts.

Characteristics: 2 metal cover brackets; 2 locks with key; 3 metal rear hinges; bottom with removable and adjustable dividers; ergonomic handle covered with rubber; name plate; provision for additional third panel, 1 tool holder panel with elastic bands on one side; 1 tool holder panel with elastic bands on both sides; document area.



N90505	€	Internal dimensions (mm)	Weight (Kg)	
N905050005	-, ♦	465x352x215	5,2	



