
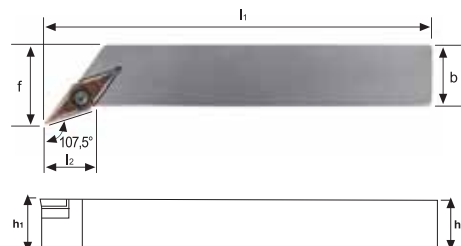


Portainsero per tornitura esterna 107,5°

Portainsero per tornitura esterna stelo in acciaio, sede per inserto positivo a norma ISO con fissaggio a vite, da utilizzare nelle lavorazioni di tornitura e copiatura.



Codice	€	ISO	Dimensioni				
			h1 (mm)	h2 (mm)	l1 (mm)	l2 (mm)	f (mm)
A620230112	—	SVHBR 1212 F11	12	12	80	11,4	16
A620230116	—	SVHBR 1616 H11	16	16	100	11,4	20
A620230120	—	SVHBR 2020 K11	20	20	125	14,6	25
A620230122	—	SVHBR 2020 K16	20	20	125	13,2	25
A620230125	—	SVHBR 2525 M16	25	25	150	19,6	32
A620230212	—	SVHBL 1212 F11	12	12	80	11,4	16
A620230216	—	SVHBL 1616 H11	16	16	100	11,4	20
A620230220	—	SVHBL 2020 K11	20	20	125	14,6	25
A620230222	—	SVHBL 2020 K16	20	20	125	13,2	25
A620230225	—	SVHBL 2525 M16	25	25	150	19,6	32

Ricambi				
Inserto	Sottopiacchetta	Vite sottopiacchetta	Vite inserto	Giravite
VBMT 1103	-	-	A910250015	A559250070
VBMT 1604	A910500010	A910100005	A910250005	A559250090
VBMT 1103	-	-	A910250015	A559250070
VBMT 1604	A910500010	A910100005	A910250005	A559250090

Ricambi: vedi pag. 523/524/525/526.

Codice	€	 Pz.	Foto	Denominazione	Figura	Dimensioni (mm)					Classi metallo duro									
						l	d	s	d1	r	Non rivestiti	Rivestiti								Cermet
											NK 15	NP 25	RP 200	RP 300	RK 300	RK 400	KTP 230	TIN	TIALN	CX 55
A931020555		10		VBMT 110304		11,1	6,35	3,18	2,9	0,4							●			
A931021055		10		VBMT 160404		16,6	9,52	4,76	4,4	0,4								●		
A931021555		10		VBMT 160408		16,6	9,52	4,76	4,4	0,8								●		

Tabella materiali e parametri di utilizzo consigliati vedi pag. 418/419/420/421.