
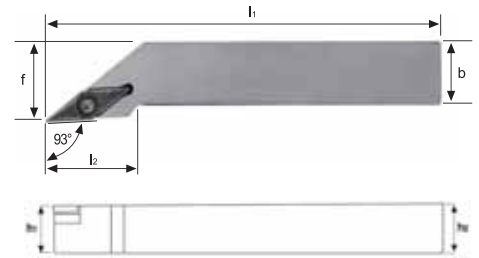


Portainsero per tornitura esterna 93°

Portainsero per tornitura esterna stelo in acciaio, sede per inserto positivo a norma ISO con fissaggio a vite, da utilizzare nelle lavorazioni di tornitura e copiatura.



Codice	€	ISO	Dimensioni					
			h1 (mm)	h2 (mm)	b (mm)	l1 (mm)	l2 (mm)	f (mm)
A620300112	---	SVJCR 1212 F11	12	12	12	80	21,5	16
A620300116	---	SVJCR 1616 H11	16	16	16	100	21,5	20
A620300120	---	SVJCR 2020 K11	20	20	20	125	23	25
A620300125	---	SVJCR 2525 M11	25	25	25	150	25,5	32
A620300220	---	SVJCR 2020 K16	20	20	20	125	29,5	25
A620300225	---	SVJCR 2525 M16	25	25	25	150	32,5	32
A620300312	---	SVJCL 1212 F11	12	12	12	80	21,5	16
A620300316	---	SVJCL 1616 H11	16	16	16	100	21,5	20
A620300320	---	SVJCL 2020 K11	20	20	20	125	23	25
A620300325	---	SVJCL 2525 M11	25	25	25	150	25,5	32
A620300420	---	SVJCL 2020 K16	20	20	20	125	29,5	25
A620300425	---	SVJCL 2525 M16	25	25	25	150	32,5	32

Ricambi				
Inserto	Sottopiacchetta	Vite sottopiacchetta	Vite inserto	Giravite
VCMT 1103	-	-	A910250015	A559250070
VCMT-VCMT 1604	A910500010	A910100005	A910250005	A559250090
VCMT 1103	-	-	A910250015	A559250070
VCMT-VCMT 1604	A910500010	A910100005	A910250005	A559250090

Ricambi: vedi pag. 523/524/525/526.

Codice	€	 Pz.	Foto	Denominazione	Figura	Dimensioni (mm)					Classi metallo duro									
						l	d	s	d1	r	Non rivestiti		Rivestiti							Cermet
											NK 15	NP 25	RP 200	RP 300	RK 300	RK 400	KTP 230	TiN	TiAlN	CX 55
A931050505		10		VCMT 110302		11,1	6,35	3,18	2,9	0,2										
A931051005		10		VCMT 110304		11,1	6,35	3,18	2,9	0,4										
A931051505		10		VCMT 110308		11,1	6,35	3,18	2,9	0,8										
A931052005		10		VCMT 160404		16,6	9,52	4,76	4,4	0,4										
A931052505		10		VCMT 160408		16,6	9,52	4,76	4,4	0,8										
A931101055		10		VCMT 160404		16,6	9,52	4,76	4,4	0,4										
A931101555		10		VCMT 160408		16,6	9,52	4,76	4,4	0,8										

Tabella materiali e parametri di utilizzo consigliati vedi pag. 418/419/420/421.