
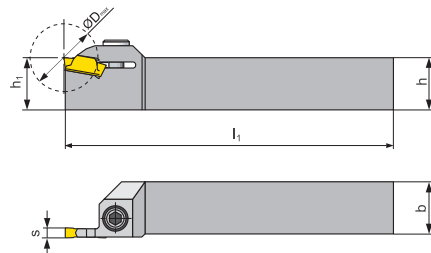


Portainsero per troncatura e scanalatura esterna

Portainsero per troncatura e scanalatura esterna con fissaggio a staffa con vite.



Codice	€	Tipo	Dimensioni				
			Dimensione attacco (mm)	b (mm)	L1 (mm)	S (mm)	ø D max (mm)
A608204000	---	GFIR 1616 H03	16x16	16	100	3	18
A608204005	---	GFIL 1616 H03	16x16	16	100	3	18
A608204030	---	GFIR 1616 H04	16x16	16	100	4	24
A608204035	---	GFIL 1616 H04	16x16	16	100	4	24
A608204040	---	GFIR 2020 K04	20x20	20	125	4	24
A608204045	---	GFIL 2020 K04	20x20	20	125	4	24
A608204050	---	GFIR 2525 M04	25x25	25	150	4	24
A608204055	---	GFIL 2525 M04	25x25	25	150	4	24
A608204175	---	GFIR 1616 H03	16x16	16	100	3	40
A608204180	---	GFIL 1616 H03	16x16	16	100	3	40
A608204185	---	GFIR 2020 K03	20x20	20	125	3	40
A608204190	---	GFIL 2020 K03	20x20	20	125	3	40
A608204195	---	GFIR 2525 M03	25x25	25	150	3	40
A608204200	---	GFIL 2525 M03	25x25	25	150	3	40

Ricambi		
Inserto	Vite	Chiave
LCMF1603../M0	A509694070	N200050050
LCMF1604../M0	A509694075	
	A509694078	
	A509694070	
LCMF1603../M0	A509694075	
	A509694078	

Ricambi: vedi pag. 523/524/525/526.

Inserto in metallo duro per troncatura e scanalatura

Inserto in metallo duro per operazioni di troncatura e scanalatura di acciai, acciaio inossidabile e ghisa.



LCMF-16F



LCMF-16M0-MP

Codice	€	Pz.	Tipo	Spessore inserto (mm)		P	M	K	N	S	H
A569694320	---	10	LCMF 160304-F U 9035	3	Vc m/min.	130-250	75-150	120-235	-	-	-
					f mm/U.	0,05-0,17	0,05-0,13	0,05-0,17	-	-	-
					ap/mm	0,3-3	0,3-2,3	0,3-3	-	-	-
A569694323	---	10	LCMF 1603M0-MP U 9035	3	Vc m/min.	130-250	75-150	120-235	-	-	-
					f mm/U.	0,05-0,17	0,05-0,13	0,05-0,17	-	-	-
					ap/mm	0,3-3	0,3-2,3	0,3-3	-	-	-
A569694325	---	10	LCMF 160404-F U 9035	4	Vc m/min.	110-220	65-120	100-190	-	-	-
					f mm/U.	0,08-0,25	0,08-0,19	0,08-0,25	-	-	-
					ap/mm	0,5-3	0,5-2,3	0,5-3	-	-	-
A569694330	---	10	LCMF 1604M0-MP U 9035	4	Vc m/min.	130-240	75-140	120-225	-	-	-
					f mm/U.	0,08-0,25	0,08-0,19	0,08-0,25	-	-	-
					ap/mm	0,5-3	0,5-2,3	0,5-3	-	-	-