

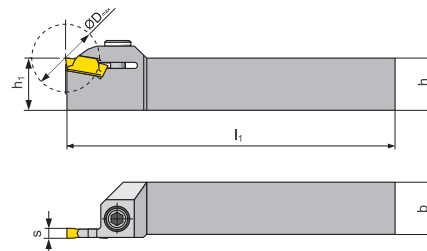


[← Previous page](#)

Code	€	Pz.	Type	a ± 0,06 (mm)	b (mm)	r (mm)	Free angle	K		P	M	K	N	S	H
A573400090	---	◇	10	LFMX 2.00-0.16SR12 MU 9035	2	1,6	0,16	-	12°	Vc m/min.	-	-	-	-	-
										f mm/U.	0,05-0,12	0,05-0,12	0,05-0,12	-	-
A573400095	---	◇	10	LFMX 2.00-0.16SL12 MU 9035	2	1,6	0,16	-	12°	Vc m/min.	-	-	-	-	-
										f mm/U.	0,05-0,12	0,05-0,12	0,05-0,12	-	-
A573400033	---	◇	10	LFMX 3.10-0.20SR8 MU 9035	3,1	2,6	0,2	-	8°	Vc m/min.	95-180	55-105	90-170	140-630	15-50
										f mm/U.	0,07-0,2	0,07-0,15	0,07-0,2	0,07-0,2	0,1-0,2
A573400035	---	◇	10	LFMX 3.10-0.20SL8 MU 9035	3,1	2,6	0,2	-	8°	Vc m/min.	95-180	55-105	90-170	140-630	15-50
										f mm/U.	0,07-0,2	0,07-0,15	0,07-0,2	0,07-0,2	0,1-0,2
A573400053	---	◇	10	LFMX 4.10-0.20SR8 MU 9035	4,1	3,6	0,2	-	8°	Vc m/min.	95-180	55-105	90-170	140-630	15-50
										f mm/U.	0,07-0,25	0,07-0,19	0,07-0,25	0,07-0,25	0,1-0,2
A573400055	---	◇	10	LFMX 4.10-0.20SL8 MU 9035	4,1	3,6	0,2	-	8°	Vc m/min.	95-180	55-105	90-170	140-630	15-50
										f mm/U.	0,07-0,25	0,07-0,19	0,07-0,25	0,07-0,25	0,1-0,2



Toolholder for cutting-off and external grooving

Toolholder for cutting-off and external grooving, with shaft mount with screw.



Code	€	Type	Dimensions				
			Coupling dimensions (mm)	b (mm)	L1 (mm)	S (mm)	ø D max (mm)
A608204000	---	◇ GFIR 1616 H03	16x16	16	100	3	18
A608204005	---	◇ GFIL 1616 H03	16x16	16	100	3	18
A608204030	---	◇ GFIR 1616 H04	16x16	16	100	4	24
A608204035	---	◇ GFIL 1616 H04	16x16	16	100	4	24
A608204040	---	◇ GFIR 2020 K04	20x20	20	125	4	24
A608204045	---	◇ GFIL 2020 K04	20x20	20	125	4	24
A608204050	---	◇ GFIR 2525 M04	25x25	25	150	4	24
A608204055	---	◇ GFIL 2525 M04	25x25	25	150	4	24
A608204175	---	◇ GFIR 1616 H03	16x16	16	100	3	40
A608204180	---	◇ GFIL 1616 H03	16x16	16	100	3	40
A608204185	---	◇ GFIR 2020 K03	20x20	20	125	3	40
A608204190	---	◇ GFIL 2020 K03	20x20	20	125	3	40
A608204195	---	◇ GFIR 2525 M03	25x25	25	150	3	40
A608204200	---	◇ GFIL 2525 M03	25x25	25	150	3	40

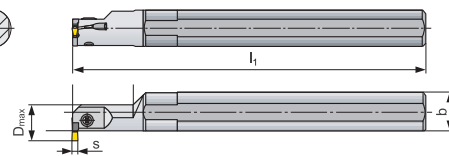

Spare parts		
Insert	Screw	Wrench
LCMF1603../M0	A509694070	N200050050
LCMF1604../M0	A509694075	
LCMF1603../M0	A509694070	

Inserts: see page 418.



Toolholder for grooves and internal grooving

Toolholder for slots and internal grooving, with shaft mount with screw.



Code	€	Type	Dimensions				
			Coupling dimensions (mm)	b (mm)	L1 (mm)	S (mm)	ø D max (mm)
A608234235	---	◇ A20 N GFI-R	20x20	20	200	3	25
A608234240	---	◇ A20 N GFI-L	20x20	20	200	3	25
A608234245	---	◇ A25 N GFI-R	25x25	25	250	3	32
A608234250	---	◇ A25 N GFI-L	25x25	25	250	3	32
A608234255	---	◇ A32 R GFI-R	32x32	32	300	3	40
A608234260	---	◇ A32 R GFI-L	32x32	32	300	3	40

Spare parts		
Insert	Screw	Screwdriver
LCMF 1603	A509694170	N202350150

Inserts: see page 418.